

INSTALLATION INSTRUCTIONS

4093 (2005-2011 DAKOTA CLUB CAB 3DR.)

Parts List:

QTY

- | | |
|---|---|
| (1) Sidebar set
(Driver & Passenger) | (1) Hardware kit including:
(4) 1/2 x 2" hex head bolt
(4) 1/2" Flat washer
(4) 1/2" Lock washer |
| (2) Front mounting bracket | |
| (2) Rear mounting bracket | |

Tools Required:


- | | |
|-------------|---------|
| 3/4" Socket | Ratchet |
| 18mm Socket | |

Instructions:

Approximated installation time: 25 min.

1. Read and understand instructions completely before beginning installation.
2. Sidebar set consists of one piece for a driver and one for the passenger side. Be sure to determinate the correct side before installation. *Note:* The smallest bracket is front mounting bracket.
3. Reach and remove the four applicable body mounting bolts from the vehicle. Keep the bolts because they are re-usefulness also the body steel washer plates and rubber cushions between the body mount and the mounting bracket.
4. Place the front and rear mounting brackets onto the body mount and re-attach using the bolts kept in the line 3. Do not tighten at this time.
5. Place the sidebar up to the mounting brackets. Bolt front/rear-mounting brackets using 1/2 x 2" hex head bolt, flat and lock washers. Leave them loose.
6. Make any final adjustments to the alignment of the sidebar and tighten all bolts. Repeat the same procedure with the opposite side.
7. You may need to periodically re-tighten the bolts.

Assembly Diagram :

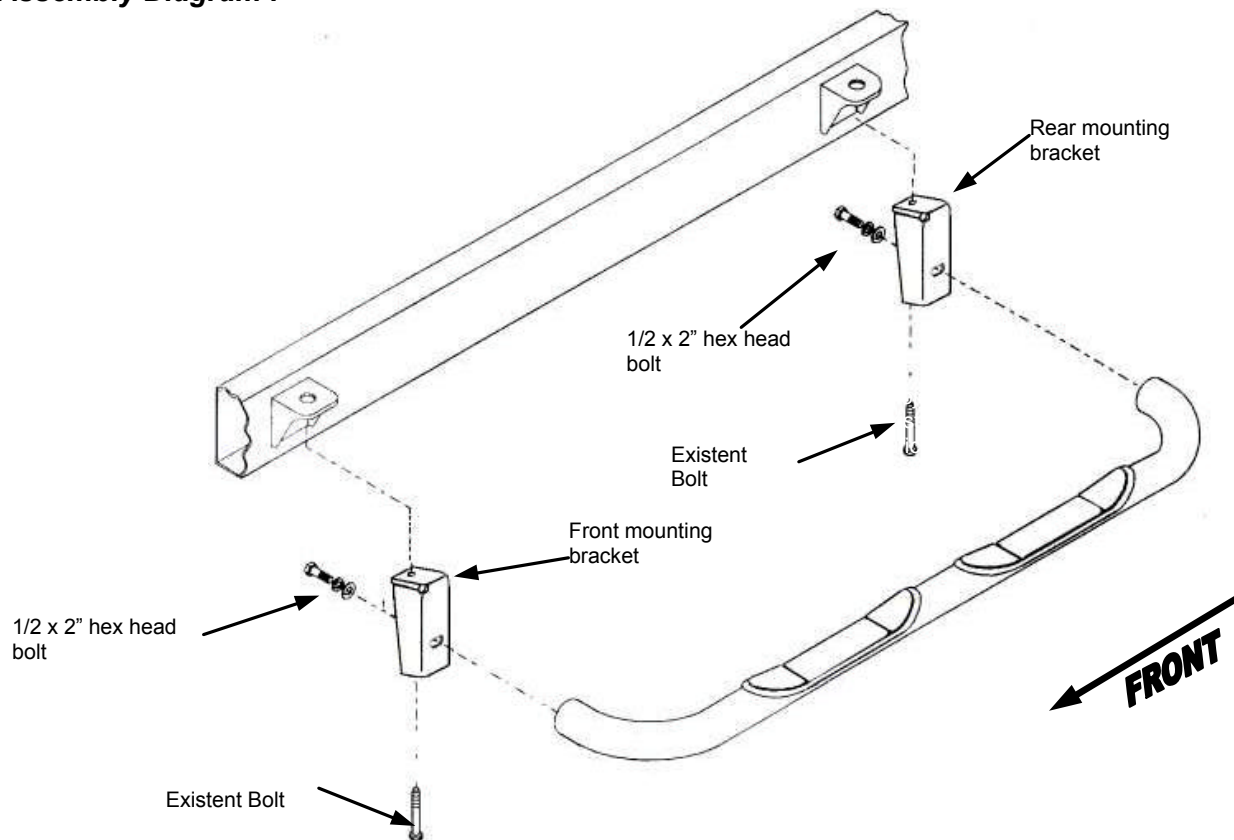

Cleaning and care instructions:

Protect the finish with a non-abrasive automotive wax, (e.g. Pure Carnauba) on a regular basis. The use of any soap, polish, or wax that contains an abrasive is detrimental to the finish, as the compounds scratch the finish and cause corrosion.