



CT2003FB



CT2004FB



CT2005

## FEATURES

- 2,000 LBS Lifting Capacity
- 6,000 FT-LBS Crane Moment Rating
- Electric 12V Power
- Venturo Heavy-Duty, High Torque, High-Speed Electric Winch:
  - 12V DC Heavy Duty Motor
  - 1,200 LB Single-line capacity, 2,000 LB double-line capacity
  - Self-locking, oil-lubricating bronze worm gear reduction with self-adjusting, oil cooled mechanical brake
  - Tapered flanges on winch drum cheek plates to reduce wire rope tangle
  - Re-buildable gearbox minimizes long-term maintenance costs
- Meets ANSI B30.5 safety standards
- Mounting sockets allow easy crane removal for multiple operation locations and varied uses of vehicle
- 360 degree Manual Rotation with 8-position base lock to hold mast firmly in position while in use and while traveling
- Composite polymer and bronze self-lubricating rotation bearings are not sensitive to water, dirt, or chemical contamination

## STANDARD EQUIPMENT

- Remote Control Pendant: 15 FT cord with quick disconnect
- 35 FT of 3/16" wire rope (optional cable lengths up to 75 FT)
- Load block with swivel hook and safety latch
- Battery cable: 25 FT, 4-Gauge
- Weight: 195 – 205 LBS



# CT2003FB CT2004FB CT2005

| LIFTING CAPACITIES |                 |
|--------------------|-----------------|
| REACH (FT.)        | CAPACITY (LBS.) |
| 3                  | 2,000           |
| 4                  | 1,500           |
| 5                  | 1,200           |





## OPTIONS

- Recessed or surface mounting sockets for multiple operating locations
- Short mast for mounting on top of utility body
- AC winch for in-plant use
- Wire ropes up to 75 FT in length
- Outrigger packages for all styles of bodies
- Master disconnect switch and circuit breaker for equipment protection
- Quick disconnect battery cable plug/socket

12110 Best Place | Cincinnati, Ohio 45241 | 800-226-2238 | 513-772-8446


[info@venturo.com](mailto:info@venturo.com) | [www.venturo.com](http://www.venturo.com)



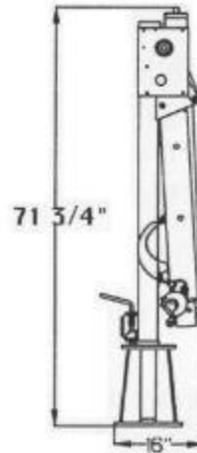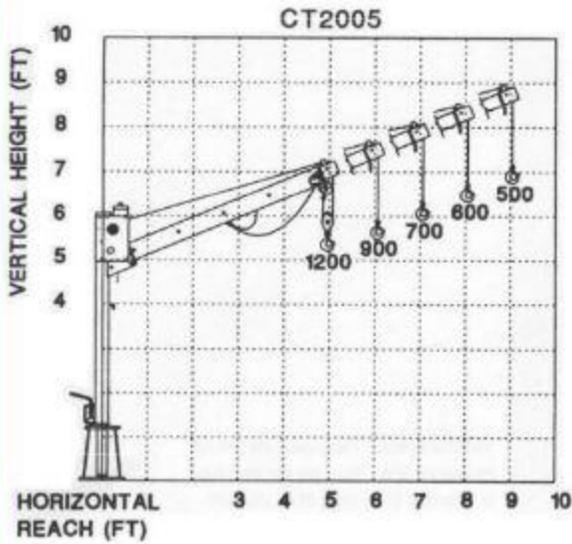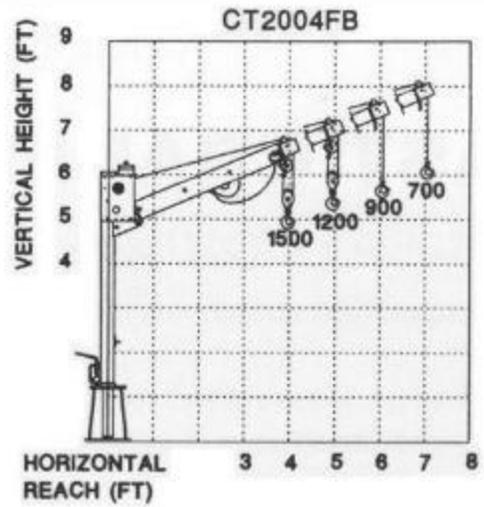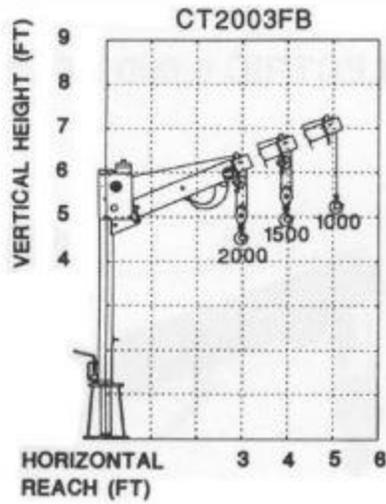


**NOTE:**  
BOOM WILL NOT FOLD  
ON CT2004 WITH "A"  
SOCKET OR ON  
CT2005.

**"A" SOCKET**



**"C" SOCKET**



**"C" SOCKET BASE  
PLATE DIMENSIONS**

